



Dajulong No.4

PVC商用卷材地板

Dajulong[®]
大巨龙弹性地板

Dajulong No.4

PVC商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	1.8 mm
Wear layer thickness 耐磨层	EN 429	0.2 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

Classification 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	> 10 ⁹⁻¹⁰
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	EN 51 130	R9

Performances 性能

Abrasion group 耐磨等级	EN 649	T
Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	≤ 0.40%
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03 mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告



Dajulong No.4

Dajulong®

Dajulong No.4

规格: 1.8mm × 2.0m × 20m




JL04-85



JL04-87




JL04-86

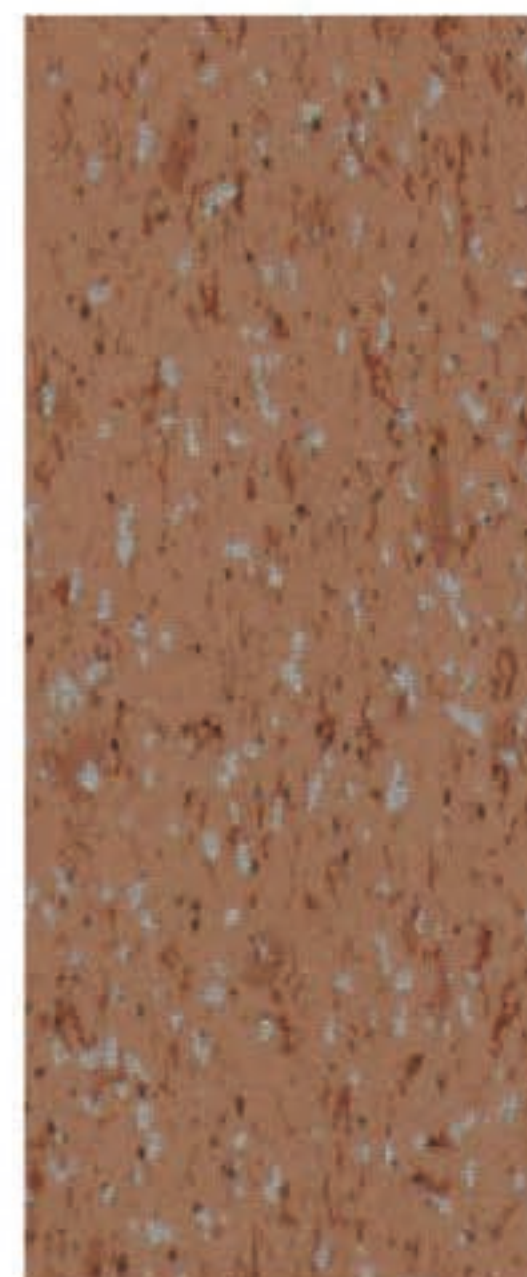


JL04-75




JL04-74

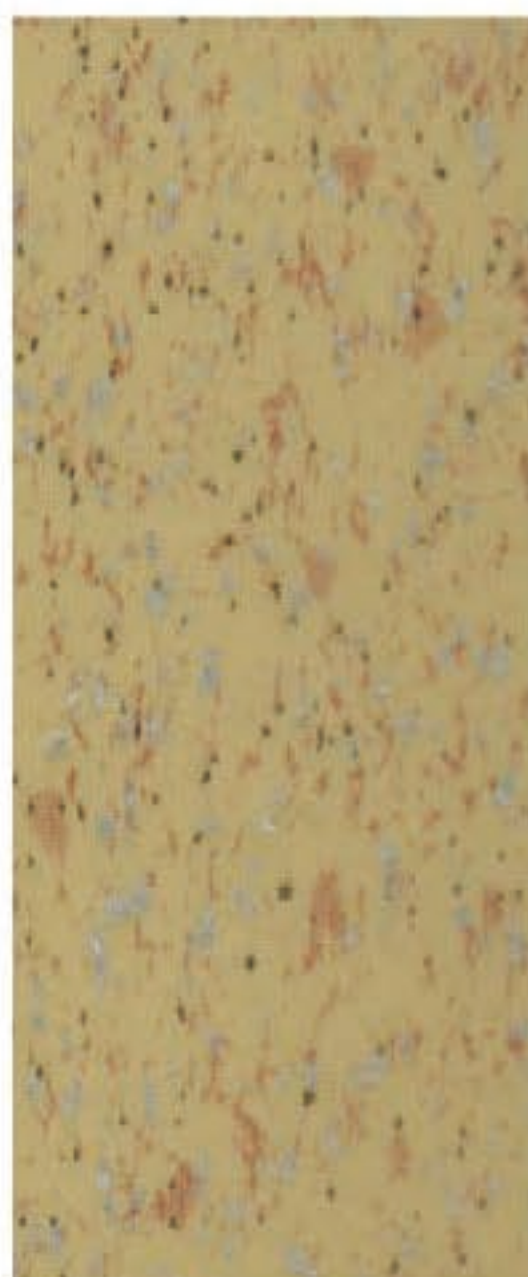


JL04-79

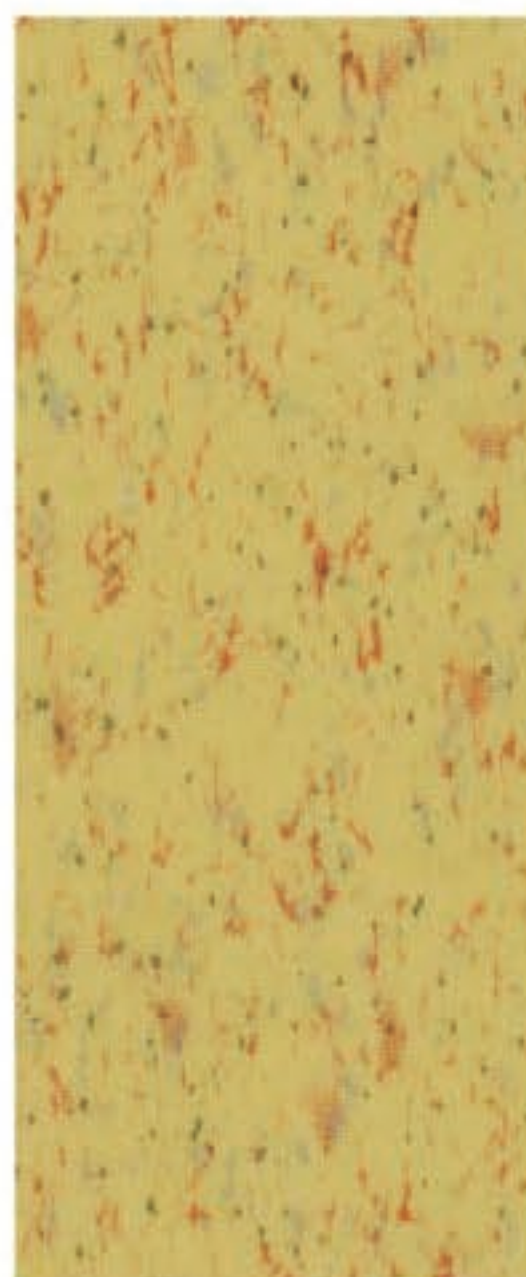

JL04-73

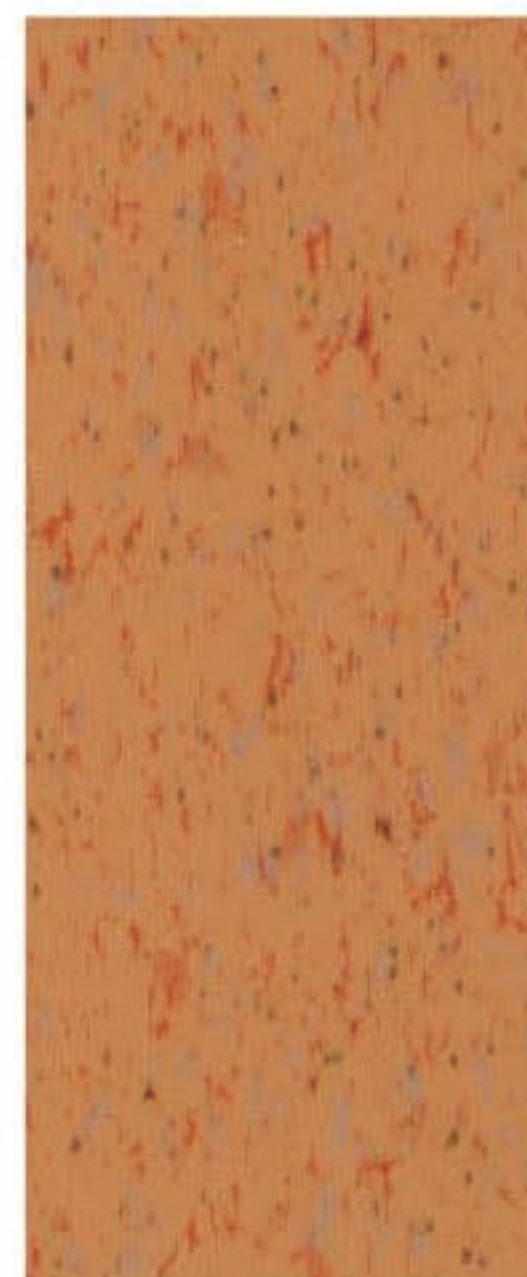

JL04-72

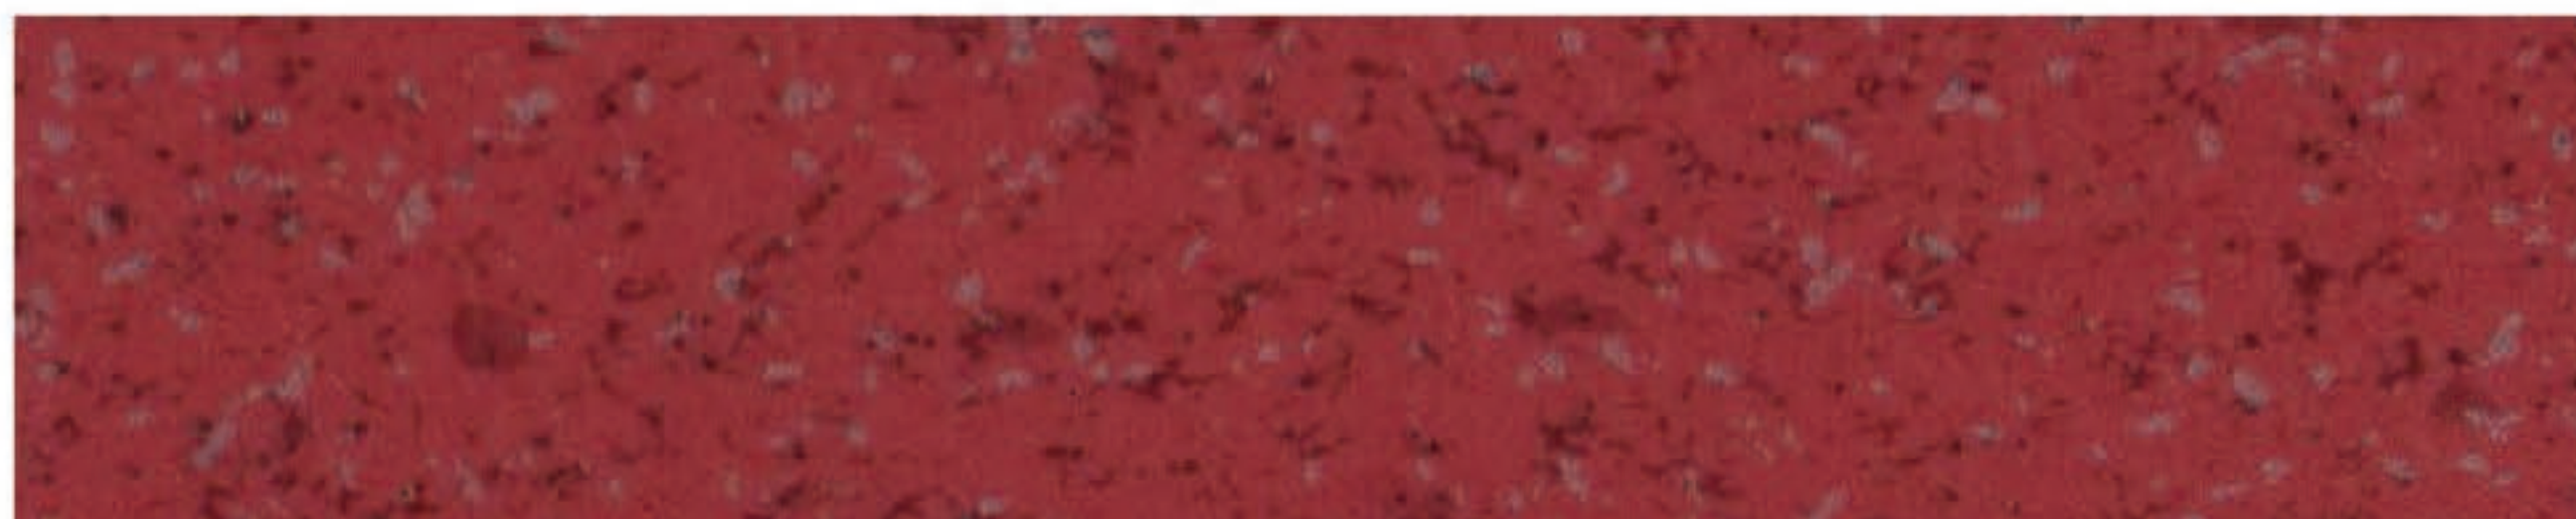

JL04-71

Dajulong No.4

Dimension: 1.8mm x 2.0m x 20m




JL04-88




JL04-76




JL04-77

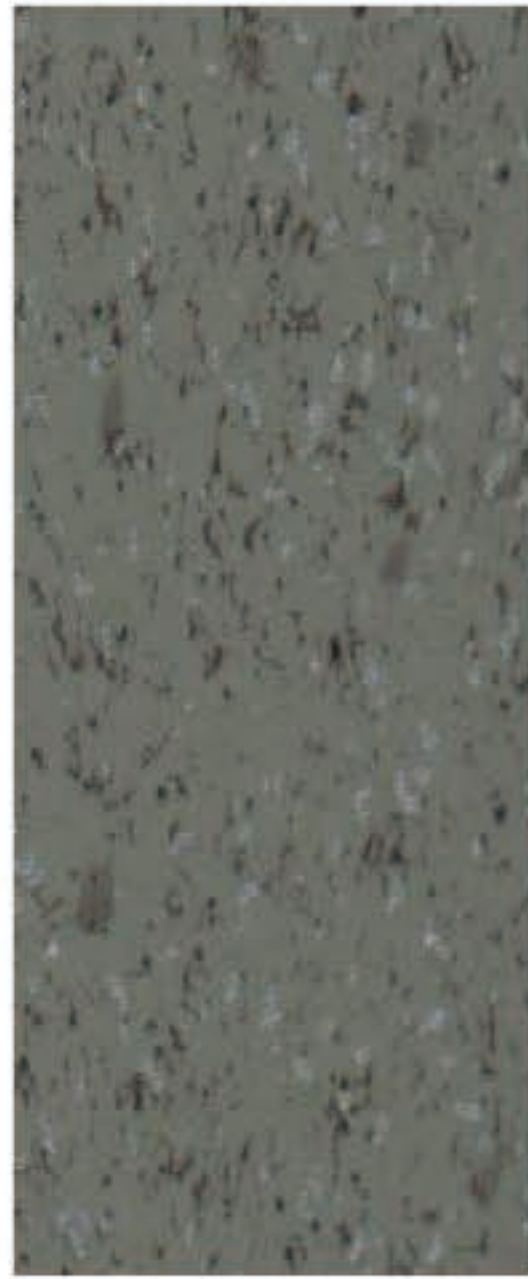

JL04-78

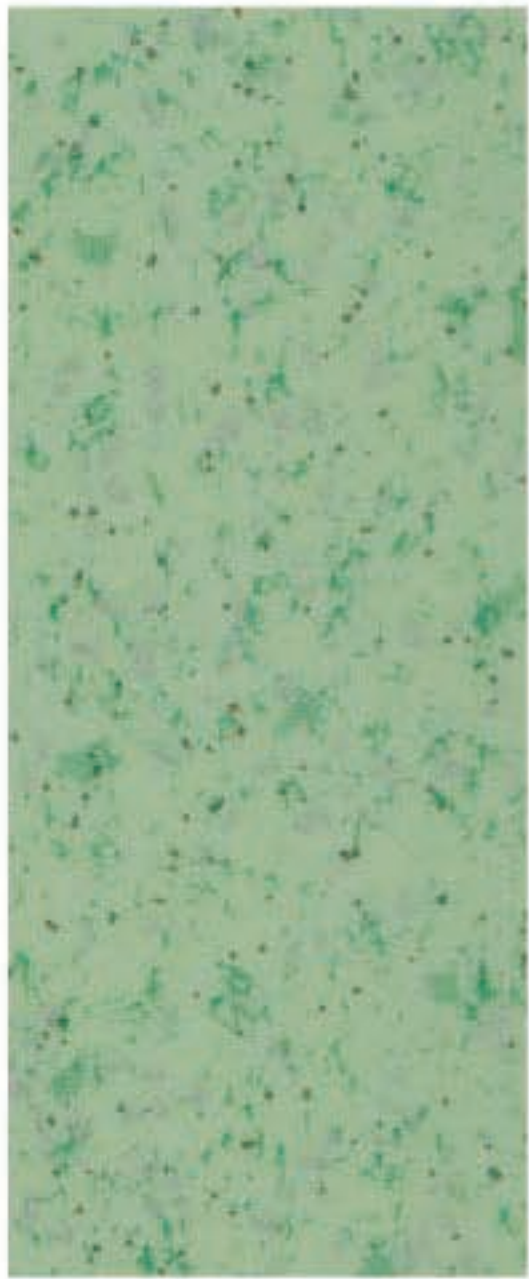


JL04-83

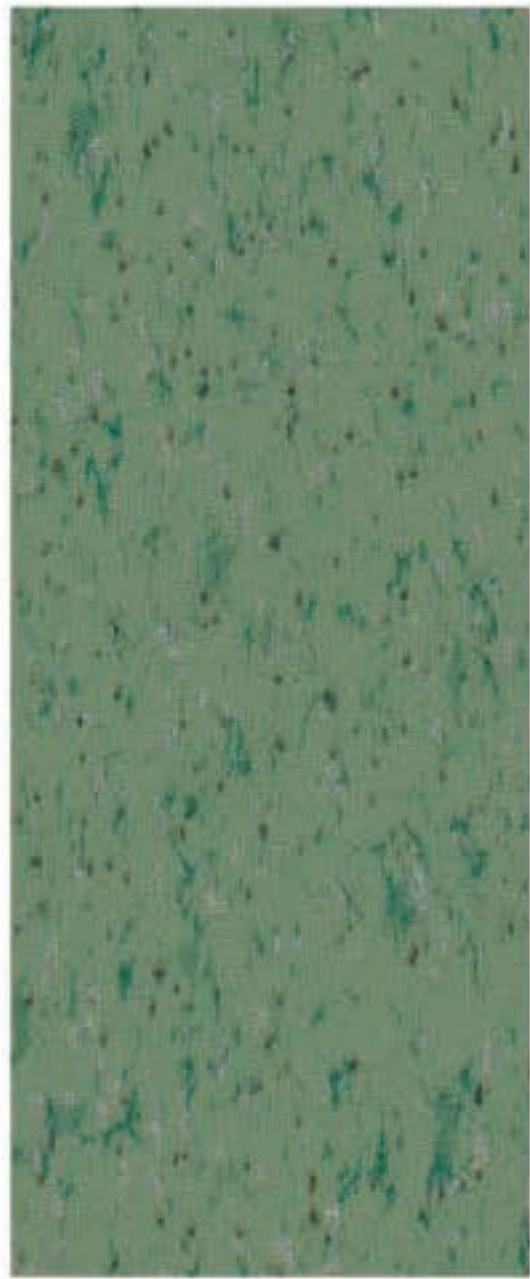

JL04-84



JL04-80

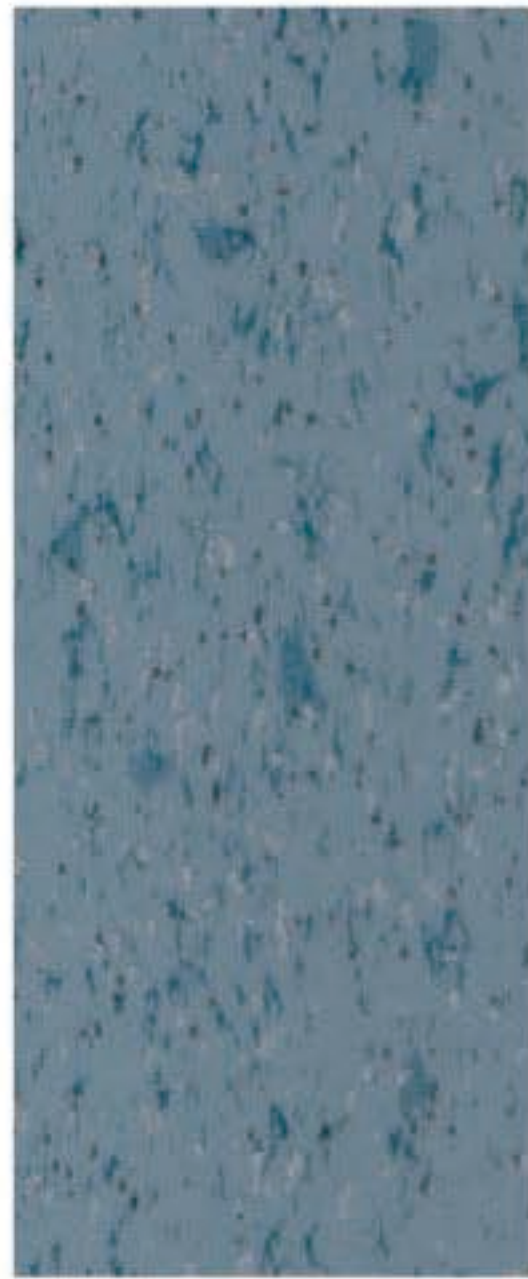

JL04-81



JL04-82

Dajulong No.4

规格: 1.8mm × 2.0m × 20m



JL04-91



JL04-92



JL04-93



JL04-94

Dajulong No.4

Dimension: 1.8mm × 2.0m × 20m



JL04-95



JL04-96



JL04-97



JL04-98

