



Dajulong No.8
复合商用卷材地板

DajuLong[®]
大巨龙弹性地板


Dajulong No.8

Dimension: 2.0mm x 2m x 20m




Dajulong No.8


规格: 2.0mm x 2m x 20m

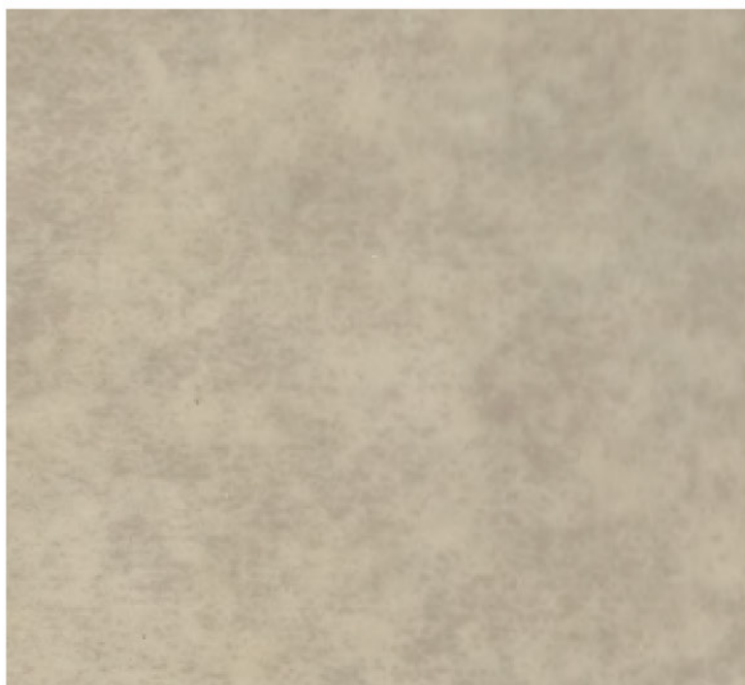


JL08-53




JL08-52



JL08-64



JL08-65




JL08-66



JL08-54



JL08-55

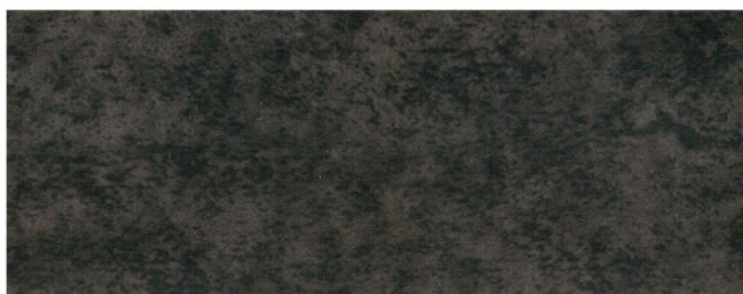

JL08-56

Dajulong No.8

Dimension: 2.0mm x 2m x 20m



JL08-61



JL08-51



JL08-71




JL08-62



JL08-63



JL08-72




JL08-73



JL08-74



JL08-75




JL08-77

Dajulong No.8

规格: 2.0mm x 2m x 20m




JL08-81

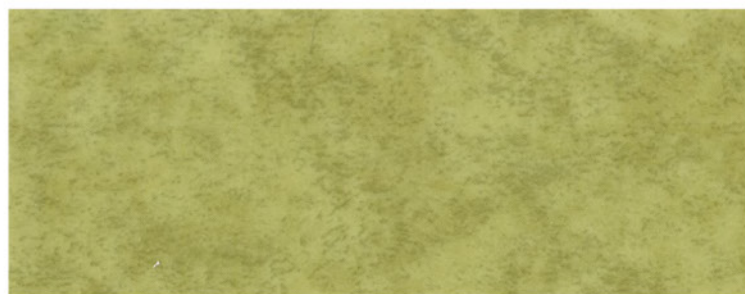


JL08-82




JL08-83

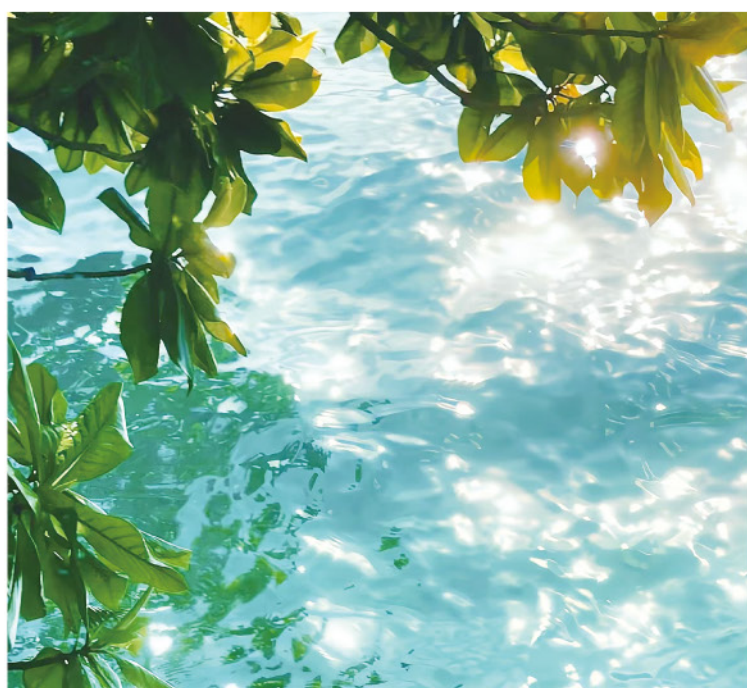


JL08-84



JL08-85



JL08-87



JL08-88



JL08-86



Dajulong No.8

规格: 2.0mm x 2m x 20m



JL08-33



JL08-32

NEW



JL08-31



JL08-38



JL08-39

Dajulong No.8

Dimension: 2.0mm x 2m x 20m



JL08-34



JL08-35



JL08-37

NEW



JL08-40

Dajulong No.8

复合商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	2 mm
Wear layer thickness 耐磨层	EN 429	0.35 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

Classification 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	$> 10^{9-10}$
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	DIN 51130	R9

Performances 性能

Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105- B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	$\leq 0.40\%$
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告

